


USER MANUAL

Single Motor Sit Stand Desk Frame Assembly Instruction

 UPLITE

UPTF02SE

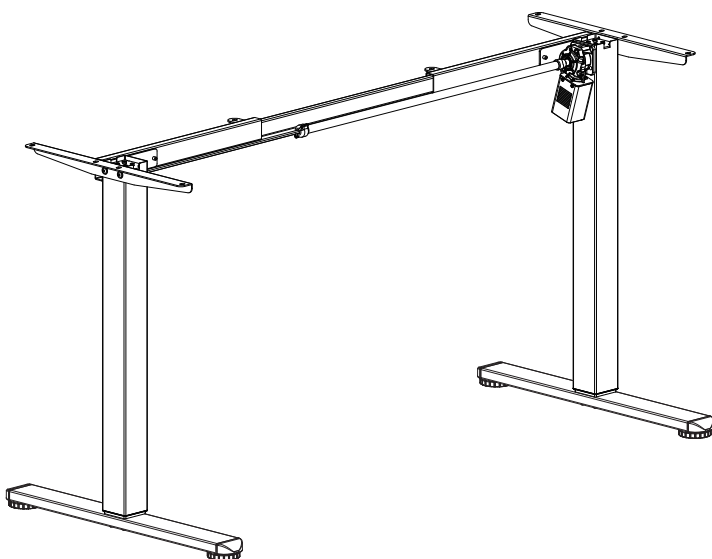

- 4 Height Position Memory
- Vertical Range: 72-118cm



Power Input
100V-240V



Speed
25 mm/s




Motion Noise
<55dB








Load Capability
176 lbs / 80 kg

**CAUTION: DO NOT EXCEED
MAXIMUM LISTED WEIGHT
CAPACITY.SERIOUS INJURY
OR PROPERTY DAMAGE MAY
OCCUR!**

COMPONENT LIST

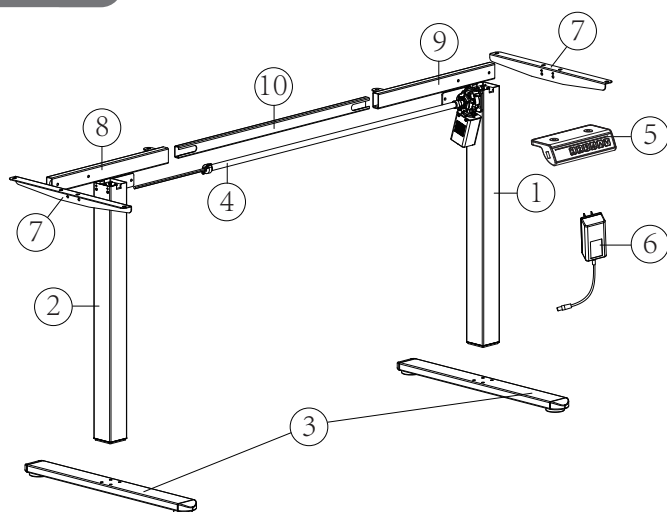

 Right Table Leg (x1)	 Left Table Leg (x1)	 Leg Base (x2)
 Transmission rod (x1)	 Control Panel (x1)	 Power Adapter (x1)
 Side Plate (x2)	 Left Crossbar (x1)	 Right Crossbar (x1)
 Crossbar (x1)		


HARDWARE LIST

A



Screws
M6×11mm (x12)

B



Screws
M6×35mm (x8)

C



Screws
M5×15mm (x16)

D



Allen Key
S=2mm (x1)

E



Allen Key
S=5mm (x1)

F



Cable Clip (x2)

G



Headphone hanger (x2)

SPARE PARTS



A

M6×11mm (x2)



B


M6×35mm (x1)




C

M5×15mm (x2)


STEP 1

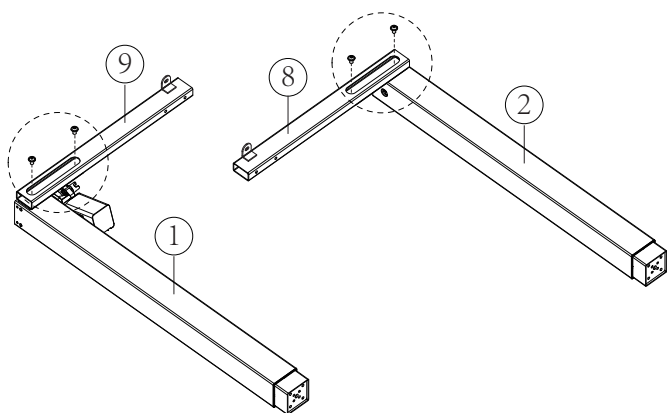


A	 M6×11mm(x4)
E	 S=5mm






STEP 2

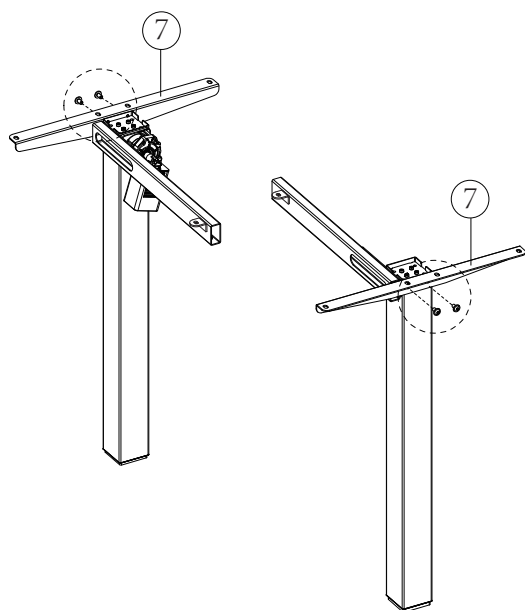

A	 M6×11mm(x4)
E	 S=5mm






STEP 3

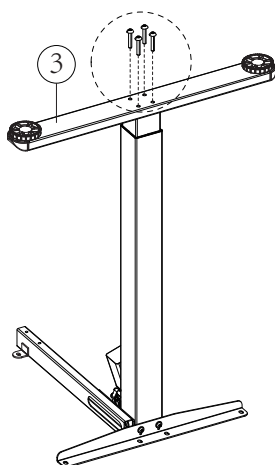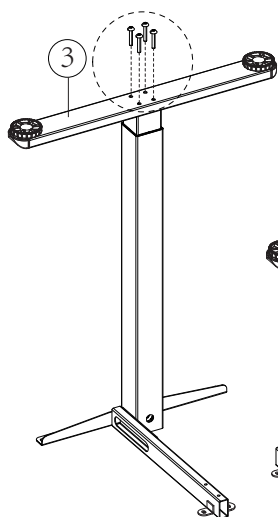

B	 M6×35mm(x8)
E	 S=5mm

STEP 4

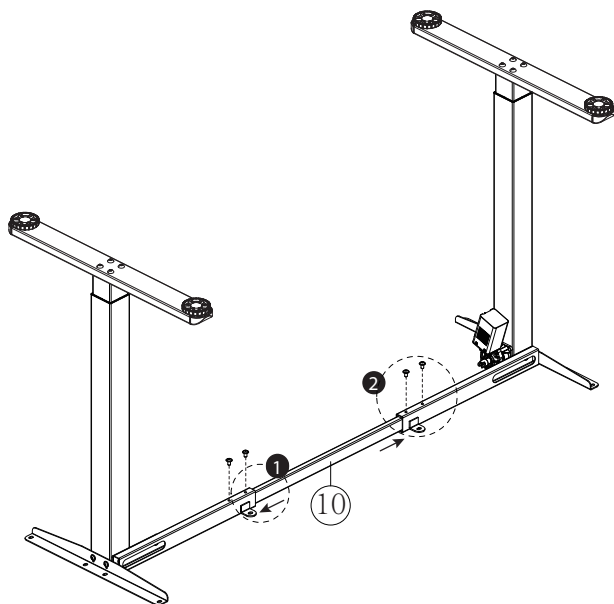



A	 M6×11mm(x4)
E	 S=5mm

STEP 5


D




S=2mm

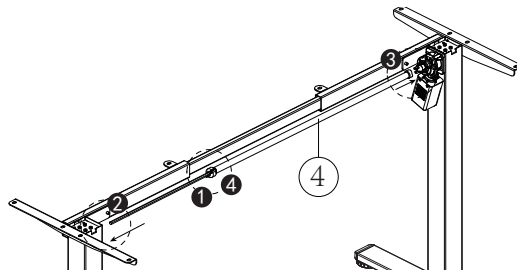

Loosen the knob




Insert the transmission rod into the hex hole and turn the transmission rod clockwise until the left leg goes to the lowest position.



Insert the other end of transmission rod to the slot on the leg (You may rotate the rod slightly for better installation).

Secure the transmission rod to the slot by tightening the pre-assembled set screw using the small allen key.



Tighten the knob

STEP 6


Note: The tabletop not included.

C

M5X15mm (x12)





Pistol Drill
(not included)

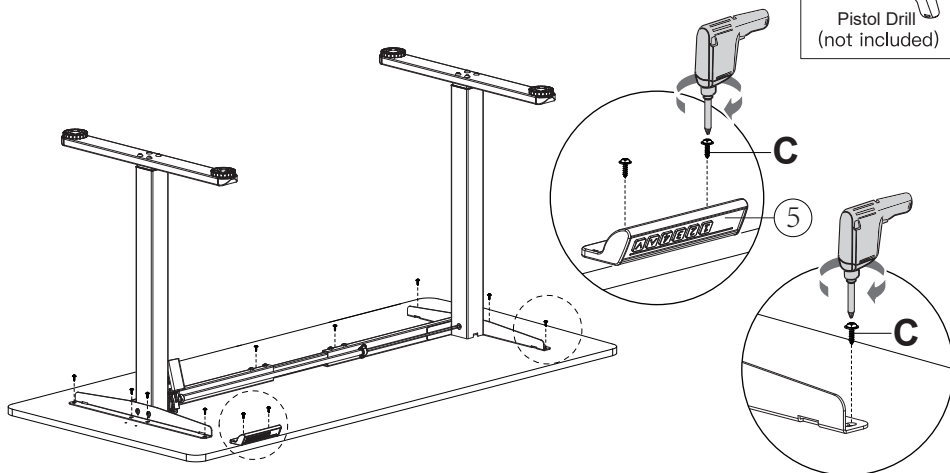






STEP 7

C	 M5X15mm (x4)
G	 Headphone hanger (x2)

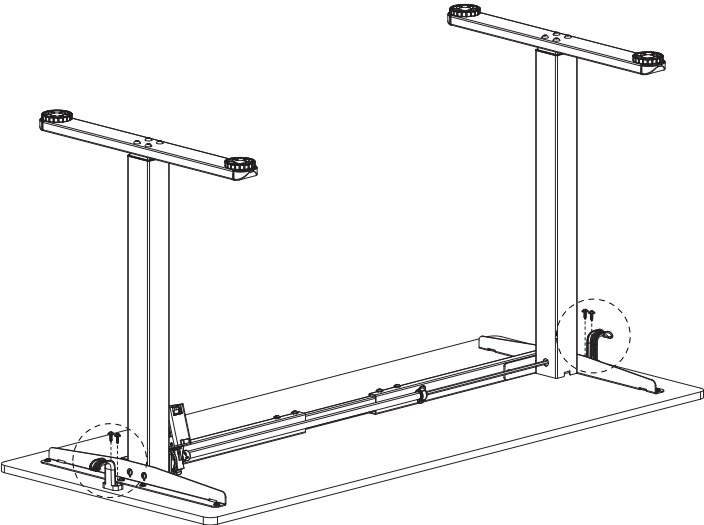


STEP 8

F	 Cable Clip (x2)
---	---

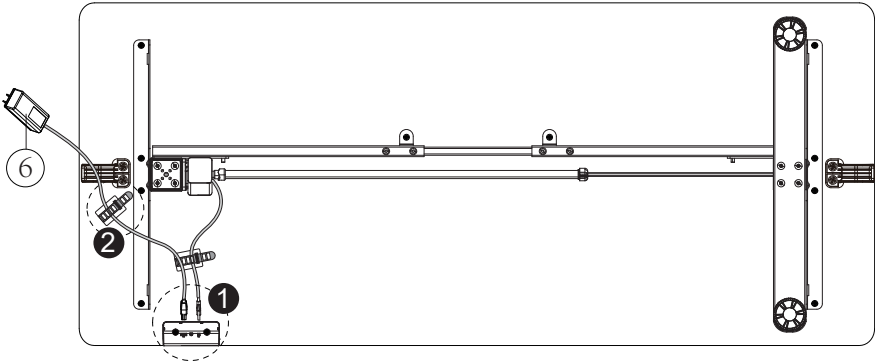

Controller Introduction

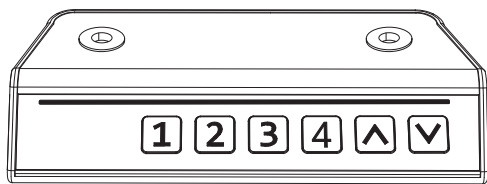

072

LED Display: Press any key once to wake up the display.

1 2
3 4

Memory button settings: adjust the desk to the height you like, then press the long button for about 3 seconds, the height of memory settings complete



Long press the  button to raise the desk continually, and desk will stop when the button was released or at the max height (46.5" / 118cm)



Long press the  button to lower the desk continually, and desk will stop when the button was released or at the lowest height (28.3" / 72cm)

Reset

Press and hold the  button until "rES" appears on the screen, then release it. The screen will return to 072. The desk will automatically descend to the lowest level and rebound slightly.

Protection Mode Error Codes

Hot	Overheat protection: When the motor operates continuously, it will stop running to prevent damage caused by overheating. Wait for a period of time (proposal 15-18 minutes) before making any further height adjustments.
E10	Sensor malfunction warning: Motor safety sensor cannot be detected. Please power off, unplug the cables of the controller, then plug in the cables and connect the power again, and perform rES settings again.
E20	Overloading Warning: Over the max of loading weight. Power off, take the things off the desk, power back on, and try again.
E02	Operation Status Warning: The desk stops moving if vibration, impact, or incline is detected. If this detection is incorrect, follow the reset instructions before continuing use.
E32	Overvoltage Protection: Input voltage too high. If the correct AC adapter is being used, please power off, unplug the cables of the controller, then plug in the cables and connect the power again, and perform rES settings again.
E31	Undervoltage Protection: Input voltage too low. If the correct AC adapter is being used, please power off, unplug the cables of the controller, then plug in the cables and connect the power again, and perform rES settings again.